MBX5T Buggy **Set Up Sheet** Ver. 0601E MUGEN SEIKI

Name: Tom Wolf
Date: 20 Dec 2008
Track: Silver Bowl (Las Vegas, NV)

Track Conditions

Size:	☐ Open	☑ Med.	☐ Tight
Traction:	☐ High	☑ Med.	☐ Low
Surface:	☐ Smooth	☑ Med.	☑ Bumpy

Front Suspension

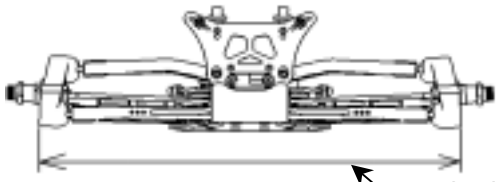

E0111A — Track width



Upper arm spacer — Upper arm position

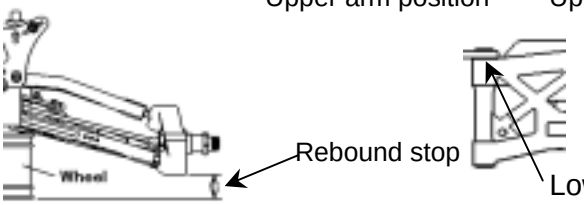

Rebound stop

Track width ---------- mm
Camber angle -2 °
Upper arm spacer 3 mm
Toe angle +1-2 °
Rebound stop Full droop mm
Anti-roll bar ☑ Use 2.7 mm ☐ None

Lower arm mount (Kick up)

-0 °

Upper arm position (E0111A)



☐ ☑

☐ E0106A - E0106B (High)
☑ E0106C - E0106D (Low)

Lower arm spacer 2mm in front of arm

Front Shocks

Piston 6x1.25
Oil # 700
Spring Kyo Blue bug
Spacer 6.75 mm
Shock position

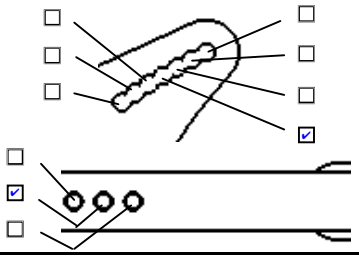

Steering Ackerman



Rear Suspension



Rebound stop

Camber angle -2 °
Lower arm mount
(Anti-squat) ☑ 0° ☐ -1°
(Toe angle) -2.0 °

Rebound stop Full droop mm
Anti-roll bar 3.0 mm
Anti-squat (E0111C,E0111D)

Upright ☐ E0110 ☑ E0126(Aluminium)

Upper arm position

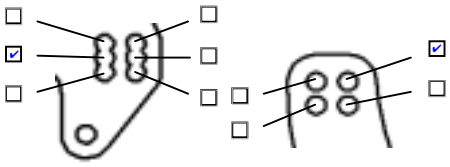

Wheelbase adjustment

0 mm



Front

Upright Pin Position



Rear Shocks

Piston 6x1.25
Oil # 550
Spring Kyo Blue Trug
Spacer 12.5 mm
Shock position

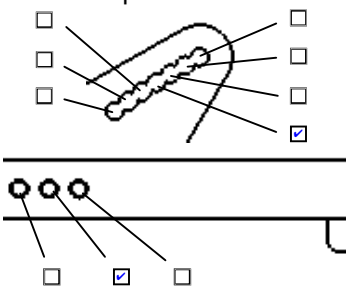

Wing Position



Engine

Type '08 Ninja JX B01 Plug P3
Gasket .016 deck ~~mm~~ Rrducer ϕ7mm
Muffler Ninja 2042 Manifold Ninja smooth bend
Fuel Werks 30%

Diff. Oil

Front	#	7,000	O-Ring 0 pcs.	☐ Other	
Center	#	10,000	0 pcs.	☐ Other	
Rear	#	5,000	0 pcs.	☐ Other	

Tire

<Front>		<Rear>	
Type	City Blocks (Med)	Type	City Blocks (Med)
Foam	AKA	Foam	AKA

Clutch

Clutch shoes ☑ Aluminium ☑ Other UE 3.0 4-shoe
Spring Ofna .9 mm
Clutch bell / Spur gear 13 T / 46 T

Result

Race time / Lap
Best lap (1Lap)

Comments:

* Sway bars mounted outer hole on the arms. 0 pre-load rear/ 0 front.
* Droop not limited.
* 6mm of threads showing on servo saver.